

Netherlands  
organization for  
applied scientific  
research



TNO Physics and Electronics  
Laboratory



DTIC FILE COPY

10-90-1227

TOCK

Report number: 10-90-1227

Final report of the project

on the development of a new

AD-A225 063

DTIC  
ELECTE  
AUG 7  
S E D

DISTRIBUTION STATEMENT A

Approved for public release;  
Distribution Unlimited

TNO-report

P.O. Box 96864  
2509 JG The Hague  
Oude Waalsdorperweg 63  
The Hague, The Netherlands  
Fax +31 70 328 09 61  
Phone +31 70 326 42 21

report no.  
FEL-90-B092

copy no.

8

title

Planar near-field measurement of non-  
reciprocal antennas

Nothing from this issue may be reproduced  
and/or published by print, photoprint,  
microfilm or any other means without  
previous written consent from TNO.  
Submitting the report for inspection to  
parties directly interested is permitted.

In case this report was drafted under  
instruction, the rights and obligations  
of contracting parties are subject to either  
the 'Standard Conditions for Research  
Instructions given to TNO' or the relevant  
agreement concluded between the contracting  
parties on account of the research object  
involved.

© TNO

author:

ir. H.J. Visser

<b>Accession For</b>	
NTIS GRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	

classification


title : unclassified  
abstract : unclassified  
report : unclassified

no. of copies : 26

no. of pages : 15

appendices : -

date : April 1990

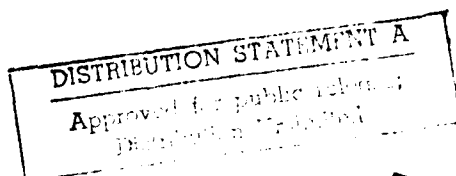

DTIC  
ELECTE  
AUG 07 1990  
S E D

report no. : FEL-90-B092  
title : Planar near-field measurement of non-reciprocal  
antennas  
  
author : ir. H.J. Visser  
institute : TNO Physics and Electronics Laboratory  
  
date : April 1990  
NDRO no. :  
no. in pow '90 : 710.2

---

## ABSTRACT (UNCLASSIFIED)

In this report the transmission equation for a planar near-field measurement configuration is derived for the situation in which the Antenna Under Test is operated as a receiving antenna. (Usually the Antenna Under Test is operated as a transmitting antenna). This transmission equation has the same form as that derived for the situation in which the Antenna Under Test is acting as transmitting antenna. With this new derived and with the existing transmission equation, it is possible to characterize non-reciprocal antennas, provided that the used probe is completely characterized.

rapport no. : FEL-90-B092  
titel : Planaire nabije-veldmetingen van niet-reciproke  
antennes  
  
auteur : ir. H.J. Visser  
instituut : Fysisch en Elektronisch Laboratorium TNO  
  
datum : april 1990  
hdo-opdr.no. :  
no. in iwp '90 : 710.2

---

#### SAMENVATTING (ONGERUBRICEERD)

In dit rapport wordt de transmissievergelijking voor een planaire nabije-veldmeetopstelling afgeleid voor de situatie waarin de testantenne gebruikt wordt als ontvangstantenne. (Normaal gesproken wordt de testantenne gebruikt als zendantenne).

Deze transmissievergelijking heeft dezelfde vorm als die afgeleid voor de situatie waarin de testantenne als zendantenne werkt. Met deze nieuw afgeleide en met de bestaande transmissievergelijking is het mogelijk niet-reciproke antennes te karakteriseren, mits de gebruikte probe geheel is gekarakteriseerd.

## CONTENTS

ABSTRACT	1
SAMENVATTING	2
CONTENTS	3
1 INTRODUCTION	4
2 ANTENNA UNDER TEST IN RECEIVE-MODE	6
3 CALCULATION OF THE RECEIVING FAR-FIELD PATTERN	12
4 CONCLUSION	14
5 REFERENCES	15

## 1 INTRODUCTION

In the FEL-TNO planar near field measurement configuration, the Antenna Under Test (AUT) is operated as a transmitting antenna and the probe as a receiving antenna, see figure 1 [1]:

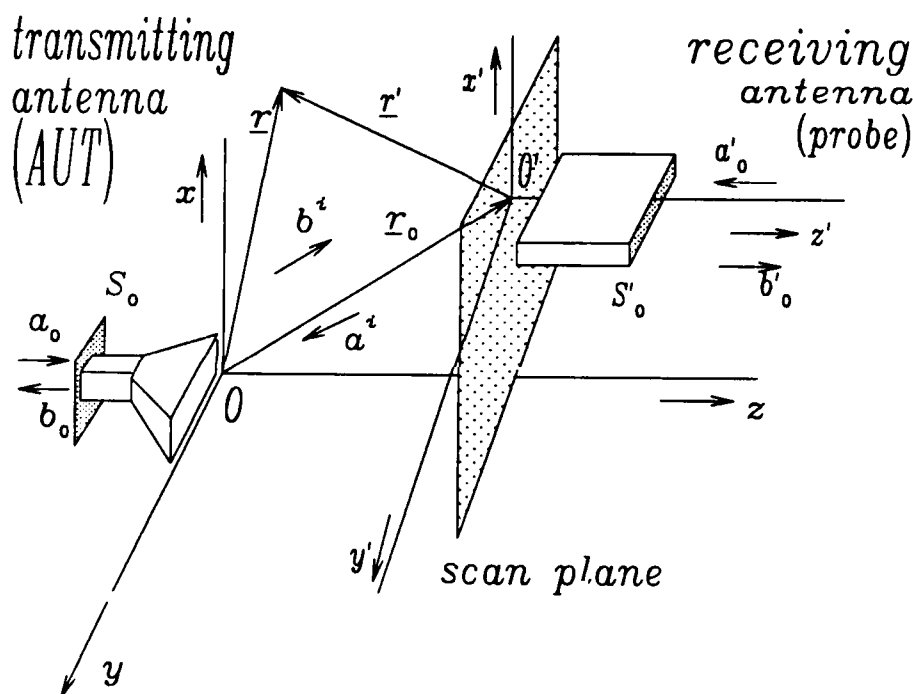


Fig. 1: Planar near-field measurement configuration

$a_0$  and  $a'_0$  are signals supplied to the antennas,  $b_0$  and  $b'_0$  are signals received by the antennas. The quantities  $a^i$  and  $b^i$  are spectrum density functions for incoming and outgoing waves and are defined in [1]. As indicated in the above figure, primes are used to associate symbols with the probe.

The relationship between  $a_0$  and  $b'_0$  is given by [1]:

$$b_0'(\underline{x}_0) = \frac{a_0}{1 - \Gamma_0' \Gamma_1'} .$$

$$\int_{-\infty}^{\infty} \int_{-\infty}^{\infty} \sum_{i=1}^2 R'^i(k_x, k_y) \cdot T^i(k_x, k_y) \cdot \exp(+j\mathbf{k} \cdot \underline{x}_0) dk_x dk_y \quad (1)$$

This equation is known as the transmission equation [2].

In the above equation,  $\Gamma_0'$  corresponds to the reflection coefficient at  $S_0'$  looking toward the probe and  $\Gamma_1'$  is the reflection coefficient when looking from probe into its load.  $R'^i(k_x, k_y)$  and  $T^i(k_x, k_y)$  are associated with respectively the receiving properties of the probe and the transmitting properties of the AUT [1].

When the AUT is an active or non-reciprocal antenna, it will have different characteristics in receive and transmit-mode. Therefore it is necessary that measurements also will be carried out for the situation in which the AUT is operated as a receiving antenna and the probe as a transmitting antenna.

It will be proven that for this situation a similar transmission equation as stated above (1) will hold true.

2

## ANTENNA UNDER TEST IN RECEIVE-MODE

The 'new' near-field measurement configuration is shown in figure 2:

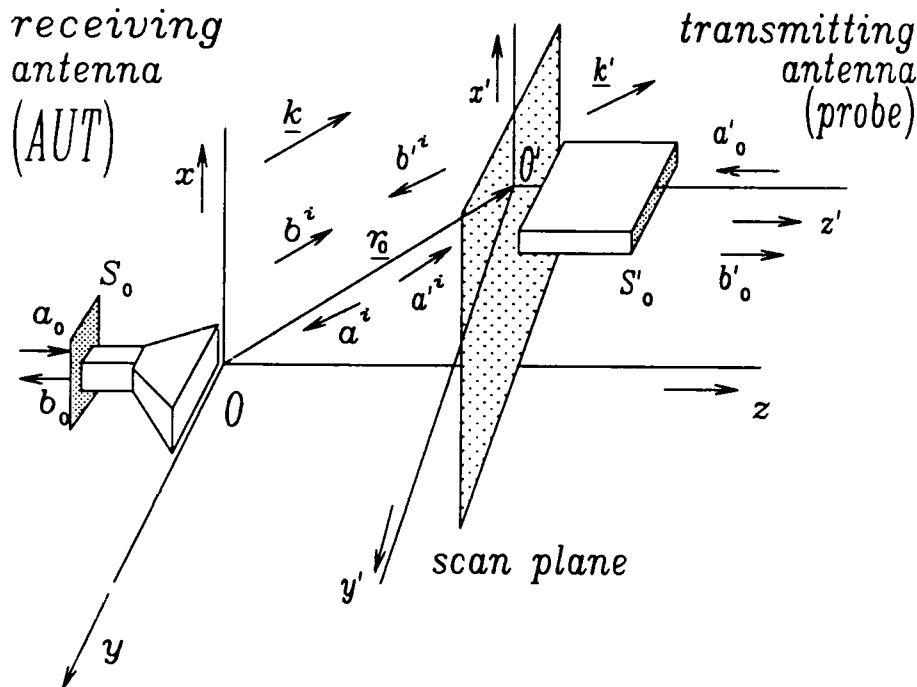


Fig. 2: Planar near-field measurement configuration with AUT in receive-mode

The relationship between  $a'_0$  and  $b_0$  is derived in the same way as the relationship between  $a_0$  and  $b'_0$ . For the derivation of the latter, the reader is referred to [1]. In the following the derivation of the relationship between  $a'_0$  and  $b_0$  will be briefly outlined:

A plane wave, that originates from the  $x'y'$ -plane, is given by:

$$\underline{E}' = \underline{A}'(\underline{k}') \cdot \exp(+j\underline{k}' \cdot \underline{r}') \quad (2)$$

The basis fields are now given by:



$$\underline{E}_1'^{\pm}(\underline{k}', \underline{r}') = [\underline{K}_1' \mp K' \gamma'^{-1} \underline{a}_z'] \cdot \exp(+j\underline{k}' \cdot \underline{r}') \quad (3a)$$

$$\begin{aligned} \underline{H}_1'^{\pm}(\underline{k}', \underline{r}') &= \pm \eta_1 \cdot \underline{a}_z' \times \underline{K}_1' \cdot \exp(+j\underline{k}' \cdot \underline{r}'); \\ \eta_1 &= \omega \epsilon / \gamma' \end{aligned} \quad (3b)$$

and:

$$\underline{E}_2'^{\pm}(\underline{k}', \underline{r}') = \underline{K}_2' \cdot \exp(+j\underline{k}' \cdot \underline{r}') \quad (3c)$$

$$\begin{aligned} \underline{H}_2'^{\pm}(\underline{k}', \underline{r}') &= [\pm \eta_2 \cdot \underline{a}_z' \times \underline{K}_2' + K' (\omega \mu)^{-1} \cdot \underline{a}_z'] \cdot \\ &\quad \cdot \exp(+j\underline{k}' \cdot \underline{r}'); \quad \eta_2 = \gamma' / (\omega \mu) \end{aligned} \quad (3d)$$

In the above equations, in analogy with [1]:

$$\underline{K}_1' = \underline{K}' / K'; \quad \underline{K}' = k_x' \cdot \underline{a}_x' + k_y' \cdot \underline{a}_y'; \quad K' = |\underline{K}'| \quad (4a)$$

$$\underline{K}_2' = \underline{a}_z' \times \underline{K}_1' \quad (4b)$$

$$k_z' = \pm \gamma'; \quad \gamma' = (k'^2 - K'^2)^{1/2}; \quad k'^2 = \underline{k}' \cdot \underline{k}' \quad (4c)$$

In (4c)  $+\gamma'$  is associated with a plane wave travelling into the positive  $z'$ -direction'  $-\gamma'$  is associated with a plane wave travelling into the negative  $z'$ -direction. The signs in equations (3a,b,c,d) have the same meaning; they indicate the direction of wave propagation. The field  $\underline{E}'(\underline{r}')$  transmitted by the probe in the region  $z' < 0$  for a specified propagation vector  $\underline{k}'$ , can now be given as a combination of

fields  $\underline{E}_1'(\underline{k}', \underline{r}')$  and  $\underline{E}_2'(\underline{k}', \underline{r}')$ . So the plane wave spectrum expansion is given by:

$$\begin{aligned} \underline{E}'(\underline{r}') = & \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} [b'^1(k'_x, k'_y) \cdot \underline{E}_1'(\underline{K}', \underline{r}') + \\ & + b'^2(k'_x, k'_y) \cdot \underline{E}_2'(\underline{K}', \underline{r}')] dk'_x dk'_y \end{aligned} \quad (5)$$

in which the coefficients  $b'^1(k'_x, k'_y)$  and  $b'^2(k'_x, k'_y)$  are referred to as spectrum density functions of outgoing waves.

The relationship between  $\underline{r}$  and  $\underline{r}'$  is given by [1] (see also figure 1):

$$\underline{r} = \underline{r}_0 + \underline{r}' \quad \Leftrightarrow \quad \underline{r}' = \underline{r} - \underline{r}_0 \quad (6)$$

and so:

$$\begin{aligned} \underline{E}_1'(\underline{K}', \underline{r}') &= [\underline{K}_1' + K' \gamma'^{-1} \underline{a}_z'] \cdot \exp(+j\underline{k}' \cdot \underline{r}') = \\ &= [\underline{K}_1' + K' \gamma'^{-1} \underline{a}_z'] \cdot \exp(+j\underline{k}' \cdot \underline{r}) \cdot \exp(-j\underline{k}' \cdot \underline{r}_0) = \\ &= \underline{E}_1'(\underline{K}', \underline{r}) \cdot \exp(-j\underline{k}' \cdot \underline{r}_0) \end{aligned} \quad (7)$$

and in the same way:

$$\underline{E}_2'(\underline{K}', \underline{r}') = \underline{E}_2'(\underline{K}', \underline{r}) \cdot \exp(-j\underline{k}' \cdot \underline{r}_0) \quad (8)$$

Substitution of equations (7) and (8) in (5) gives for the field incident upon the AUT:

$$\begin{aligned}
\underline{E}'(\underline{r}) = & \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} [b'^1(k'_x, k'_y) \cdot e^{-j\underline{k}' \cdot \underline{r}_0} \cdot \underline{E}_1'(\underline{K}', \underline{r}) + \\
& + b'^2(k'_x, k'_y) \cdot e^{-j\underline{k}' \cdot \underline{r}_0} \cdot \underline{E}_2'(\underline{K}', \underline{r})] dk'_x dk'_y = \\
= & \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} [a^1(k'_x, k'_y) \cdot \underline{E}_1'(\underline{K}', \underline{r}) + \\
& + a^2(k'_x, k'_y) \cdot \underline{E}_2'(\underline{K}', \underline{r})] dk'_x dk'_y
\end{aligned} \tag{9}$$

where:

$$\begin{aligned}
a^i(k'_x, k'_y) = & b'^i(k'_x, k'_y) \cdot \exp(-j\underline{k}' \cdot \underline{r}_0); \\
& i = 1, 2
\end{aligned} \tag{10a}$$

are the spectrum density functions of the waves incoming on the AUT.  
Since  $\underline{k}' = \underline{k}$  (see figure 2), equation (10a) gives:

$$\begin{aligned}
a^i(k_x, k_y) = & b'^i(k_x, k_y) \cdot \exp(-j\underline{k} \cdot \underline{r}_0); \\
& i = 1, 2
\end{aligned} \tag{10b}$$

The scattering equations of an antenna in the x,y-plane are given by [1, 3, 4]:

$$b_0 = \Gamma_0 \cdot a_0 + \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} \sum_{i=1}^2 R^i(k_x, k_y) \cdot a^i(k_x, k_y) dk_x dk_y \tag{11a}$$

$$b^i(k_x, k_y) = T^i(k_x, k_y) \cdot a_0 + \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} \sum_{j=1}^2 S^{i,j}(k_x, k_y; l_x, l_y) \cdot a^j(l_x, l_y) dl_x dl_y \quad (11b)$$

$\Gamma_0$  corresponds to the reflection coefficient at  $S_0$  looking toward the antenna (figure 1 and 2);  $R^i(k_x, k_y)$  and  $T^i(k_x, k_y)$  are associated with the receiving and transmitting properties of the antenna, respectively and  $S^{i,j}$  describes the scattering properties. Reception from a certain direction  $(k_x, k_y)$  depends on the scattering in all directions  $(l_x, l_y)$  from an object in front of the antenna.

The double integral in (11b) is omitted, assuming that multiple reflections between AUT and probe do not occur.

$\Gamma_1$  is the reflection coefficient, looking from AUT into the load, so:

$$a_0 = \Gamma_1 \cdot b_0 \quad (12)$$

Equation (11b), provided with primes for the probe, substituted in (10) gives:

$$a^i(k_x, k_y) = a_0' \cdot T'^i(k_x, k_y) \cdot \exp(-j\mathbf{k} \cdot \mathbf{r}_0) \quad (13)$$

and, finally, (12) and (13) substituted in (11a) leads to:

$$b_0 = \Gamma_0 \cdot \Gamma_1 \cdot b_0 + a_0' \cdot \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} \sum_{i=1}^2 R^i(k_x, k_y) \cdot T'^i(k_x, k_y) \cdot e^{-j\mathbf{k} \cdot \mathbf{r}_0} dk_x dk_y \quad (14a)$$

or:

$$b_0(\underline{0}; \underline{r}_0) = \frac{a_0'}{1 - \Gamma_0 \Gamma_1} \cdot \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} \sum_{i=1}^2 R^i(k_x, k_y) \cdot T'^i(k_x, k_y) \cdot e^{-j\mathbf{k} \cdot \underline{r}_0} dk_x dk_y \quad (14b)$$

in which  $b_0(\underline{0}; \underline{r}_0)$  means the output of the AUT in the origin  $\underline{0}$  of the coordinate system and for a probe position  $\underline{r}_0$ .

This equation is, with exception of the position of the primes and the sign of the exponent, identical to the known transmission equation (1). From the above equation the AUT receiving characteristic  $R^i(k_x, k_y)$  can be obtained, provided that the probe transmitting characteristic  $T'^i(k_x, k_y)$  is known.

## 3 CALCULATION OF THE RECEIVING FAR-FIELD PATTERN

The active (non-reciprocal) AUT can be considered as existing of two different *reciprocal* antennas; one representing the AUT in receive mode and one representing the AUT in transmit mode.

Suppose now that the AUT in receive mode is a *reciprocal* antenna with receiving characteristic  $R^i(k_x, k_y)$ ;  $i=1,2$ . For a reciprocal antenna, the receiving far-field pattern is the same as the transmitting far-field pattern and the transmitting far-field pattern can be calculated:

For a reciprocal antenna, the following equation holds true [5]:

$$\eta_0 \cdot k \cdot \underline{r}(\underline{K}) = \gamma \cdot \eta \cdot \underline{t}(-\underline{K}); \quad \eta = (\epsilon/\mu)^{1/2} \quad (15)$$

where  $\eta_0$  is the characteristic admittance of the antenna (in the receiving mode).

The complete transmitting and receiving characteristics  $\underline{t}(\underline{K})$  and  $\underline{r}(\underline{K})$  are given by [5]:

$$\begin{aligned} \underline{t}(\underline{K}) &= [k/\gamma] \cdot T^1(\underline{K}) \cdot \underline{a}_1(\underline{k}) + T^2(\underline{K}) \cdot \underline{a}_2(\underline{k}) = \\ &= [k/\gamma] \cdot T^1(k_x, k_y) \cdot \underline{a}_1(\underline{k}) + T^2(k_x, k_y) \cdot \underline{a}_2(\underline{k}) \end{aligned} \quad (16a)$$

$$\begin{aligned} \underline{r}(\underline{K}) &= -[\gamma/k] \cdot R^1(\underline{K}) \cdot \underline{a}_1(\underline{k}) + R^2(\underline{K}) \cdot \underline{a}_2(\underline{k}) = \\ &= -[\gamma/k] \cdot R^1(k_x, k_y) \cdot \underline{a}_1(\underline{k}) + R^2(k_x, k_y) \cdot \underline{a}_2(\underline{k}) \end{aligned} \quad (16b)$$

with:

$$\underline{a}_2(\underline{k}) = \underline{K}_2 - \underline{a}_1 \times \underline{K}_1; \quad \underline{K}_1 = \underline{K}/K \quad (17a)$$

$$\underline{a}(\underline{k}) = \underline{K}_2 \times \underline{a}_k; \quad \underline{a}_k = \underline{k}/k \quad (17b)$$

With the formula for the far field [6]:

$$\underline{E}(\underline{r}) \underset{r \rightarrow \infty}{\approx} -j \cdot 2\pi k \cos\theta \cdot \underline{r}(\underline{K}) \cdot \frac{e^{+jkr}}{r}; \quad k \cos\theta \in \mathbb{R} \quad (18)$$

and equation (15), the receiving far-field pattern is found to be:


$$\underset{receive}{\underline{E}(\underline{r})} \underset{r \rightarrow \infty}{\approx} -j \cdot \frac{2\pi k^2 \eta_0}{\gamma \eta} \cdot \cos\theta \cdot \underline{r}(-\underline{K}) \cdot \frac{e^{+jkr}}{r}; \quad \eta = (\epsilon/\mu)^{1/2} \quad (19)$$

with  $\underline{r}(-\underline{K})$  according to equation (16b) and:

$$\underline{K} = k \sin\theta \cos\varphi \cdot \underline{a}_x + k \sin\theta \sin\varphi \cdot \underline{a}_y \quad (20)$$

## 4 CONCLUSION

For the planar near-field measurement situation in which the Antenna Under Test is acting as a receiving antenna, an identical transmission equation holds true as in the 'usual' situation, in which the Antenna Under Test is acting as a transmitting antenna. In both planar near-field measurement configurations, the characteristics of the Antenna Under Test can be found if the probe is completely characterized.

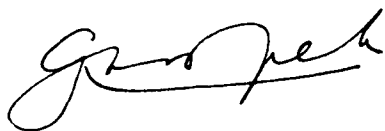

Ir. G.A. van der Spek  
(Groupleader)



Ir. H.J. Visser  
(Author)



## 5 REFERENCES

- [1] Visser, H.J.: '*Theory of planar near-field measurement*', Physics & Electronics Laboratory TNO, Report FEL-89-B273, December 1989, pp.6-18.
- [2] Newell, A.C.: '*Planar Near-Field Measurements*', National Bureau of Standards, June 1985, pp.9-10.
- [3] Rudge, A.W.; Milne, K.; Olver, A.D.; Knight, P.: '*The Handbook of Antenna Design, Volume I*', Peter Perigrines Ltd, 1982, pp.602-603.
- [4] Newell, A.C.; Crawford, M.L.: '*Planar Near-Field Measurements on High Performance Array Antennas*', National Bureau of Standards, Report NBSIR 74-380, July 1974, p.7.
- [5] Visser, H.J.: '*Theory of Planar Near-Field Measurement*', Physics & Electronics Laboratory TNO, Report FEL-89-B273, December 1989, pp.A1-A20.
- [6] Yaghjian, A.D.: '*Upper Bound Errors In Far-Field Antenna Parameters Determined From Planar Near-Field Measurements*', National Bureau of Standards, Technical Note 667, October 1975, p.11.

## REPORT DOCUMENTATION PAGE

(MOD-NL)

1. DEFENSE REPORT NUMBER (MOD-NL) TD90-1227	2. RECIPIENT'S ACCESSION NUMBER	3. PERFORMING ORGANIZATION REPORT NUMBER FEL-90-B092
4. PROJECT/TASK/WORK UNIT NO. 710.2/21877.6	5. CONTRACT NUMBER	6. REPORT DATE APRIL 1990
7. NUMBER OF PAGES 15	8. NUMBER OF REFERENCES 6	9. TYPE OF REPORT AND DATES COVERED FINAL REPORT
10. TITLE AND SUBTITLE PLANAR NEAR-FIELD MEASUREMENT OF NON-RECIPROCAL ANTENNAS		
11. AUTHOR(S) IR. H.J. VISSER		
12. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) TNO PHYSICS AND ELECTRONICS LABORATORY, P.O. BOX 96864, 2509 JG THE HAGUE, THE NETHERLANDS		
13. SPONSORING/MONITORING AGENCY NAME(S)		
14. SUPPLEMENTARY NOTES		
15. ABSTRACT (MAXIMUM 200 WORDS, 1044 POSITIONS)  IN THIS REPORT THE TRANSMISSION EQUATION FOR A PLANAR NEAR-FIELD MEASUREMENT CONFIGURATION IS DERIVED FOR THE SITUATION IN WHICH THE ANTENNA UNDER TEST IS OPERATED AS A RECEIVING ANTENNA. (USUALLY THE ANTENNA UNDER TEST IS OPERATED AS A TRANSMITTING ANTENNA). THIS TRANSMISSION EQUATION HAS THE SAME FORM AS THAT DERIVED FOR THE SITUATION IN WHICH THE ANTENNA UNDER TEST IS ACTING AS TRANSMITTING ANTENNA. WITH THIS NEW DERIVED AND WITH THE EXISTING TRANSMISSION EQUATION, IT IS POSSIBLE TO CHARACTERIZE NON-RECIPROCAL ANTENNAS, PROVIDED THAT THE USED PROBE IS COMPLETELY CHARACTERIZED.		
16. DESCRIPTORS PROBE CHARACTERISTICS		IDENTIFIERS ANTENNAS NEAR-FIELD MEASUREMENT RECIPROCAL ANTENNAS
17a. SECURITY CLASSIFICATION (OF REPORT) UNCLASSIFIED	17b. SECURITY CLASSIFICATION (OF PAGE) UNCLASSIFIED	17c. SECURITY CLASSIFICATION (OF ABSTRACT) UNCLASSIFIED
18. DISTRIBUTION/AVAILABILITY STATEMENT PUBLICLY AVAILABLE		17d. SECURITY CLASSIFICATION (OF TITLES) UNCLASSIFIED